

TECHNICAL DATA SHEET


INDUCTION HOB WITH DOWNDRAFT EXTRACTOR - BLACK



CODE : CCASP910042

ONBOARD FLEX

FUNCTIONS:

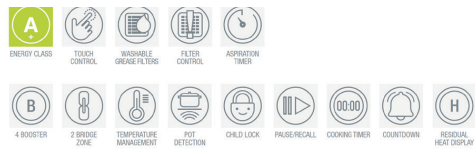

ASPIRATION PERFORMANCE

IEC AIR FLOW	639 M3 /H
TOTAL ABSORPTION	165 W
NOISE LEVEL	49/66/70 DB(A)

TECHNICAL DATA

COMMANDING CONTROL	6-SPEED TOUCH CONTROL (INTENSIVE 5+1) TOUCH CONTROL 5 SPEEDS (5+1 INTENSIVE)
FILTERS	WASHABLE GREASE FILTERS ODOUR FILTERS OPTIONAL

DIMENSION SIZE : 900 x 510 MM
CUTOUT : 850 x 470 MM
FINITURA FINISH : Black glass
AIR OUTLET SIZE : 222 x 89 MM
AIR OUTLET DIMENSION

FEATURES

- 4 BOOSTER 4 BOOSTER
- 2 ZONE BRIDGE 2 BRIDGE ZONE
- 3 SELECTABLE TEMPERATURE LEVELS
WARMING, MELTING, BOILING)
- ZEROMOISTURE SYSTEM ZERO MOISTURE SYSTEM

PERFORMANCE

COOKING ZONES	4	180X220 CM	4X2,1 KW (BOOSTER 3 KW)
MAX POWER			7,4 KW

TECHNICAL DATA

CONTROL	4-ZONE TOUCH CONTROL WITH 4 SLIDERS, 9P+B00
BRIDGE ZONE	2, LEFT AND RIG

ACCESSORIES

REGENERABLE ODOUR FILTERS KIT: AFCFCAASPC
PLUS FILTER H10/15 REFILL KIT: AFCFCARFH10
PLUS FILTER H6/8 REFILL KIT: AFFCARFPH6
DRIP TRAY KIT: AFCVRASPCOB/1
(COMPATIBLE WITH INSTALLATION OR FILTERING MODE WITH PLUS FILTER)
PLUMBING SPACE OUTLET KIT: KRASP008
(ODOUR FILTER KIT NOT INCLUDED, TO BE ORDERED SEPARATELY)

INSTALLATION DIAGRAM

