

TECHNICAL DATA SHEET

INDUCTION HOBS



CODE : HBI9005001

INDUCTION FLEXI 90

FUNCTIONS:



90 CM INDUCTION HOB, FRAMELESS, 4MM EDGE, PLANE
RESIDUAL HEAT INDICATOR
SMALL UTENSIL DETECTION
AUTO PAN DETECTION
OVER VOLTAGE PROTECTION
ANTI OVERFLOW
CHILD SAFETY LOCK
HIGH TEMP LIMIT
OVER VOLTAGE PROTECTION
OVER HEAT PROTECTION


WEIGHT N/G : 13/15
ROHS COMPLIANCE : YES
CE COMPLIANCE : YES
ENERGY EFFICIENCY CLASS : 3
CARTON BOX PACKING : 970 X 590 X 125 MM

5 INDUCTION CIRCULAR ZONES
STAINLESS STEEL FRONT TRIM
CHEF COOK FUNCTION
EASY START SYSTEM FOR AUTOMATIC PAN DETECTION
12 POWER LEVELS SUCHAS MELTING,
BOOSTER AND DOUBLE BOOSTER
END OF COOKING PROGRAMMER,
MINUTE MINDER, COUNT UP
KEY LOCK
SNAP-IN EASY INSTALLATION
COOLING SYSTEM (BACK AIR FLOW)
CABLE INCLUDED
FRONT STAINLESS STEEL TRIM
PAUSE FUNCTION, RECALL AND RESIDUAL HEATINDICATOR
AUTOMATIC SWITCH OFF WHEN OVERHEATED OR OVERFLOWED

HEATING ELEMENTS:

BURNER-1 (LEFT BOTTOM) : 2000W / 2400W / 185*185 MM
BURNER-2 (RIGHT TOP) : 1600W / 2000W / 185*185 MM
LEFT FLEX ZONES : 3600W / 3000W
BURNER-3 (RIGH TOP) : 2000W / 2400W / 185*185 MM
BURNER-4 (RIGHT BOTTOM) : 1600W (2000W) / 185*185 MM
RIGHT FLEX ZONES : 2600W (3000W)
RATED VOLTAGE : 220-240V - 50/60 HZ
TOTAL POWER : 10000W

INSTALLATION DIAGRAM

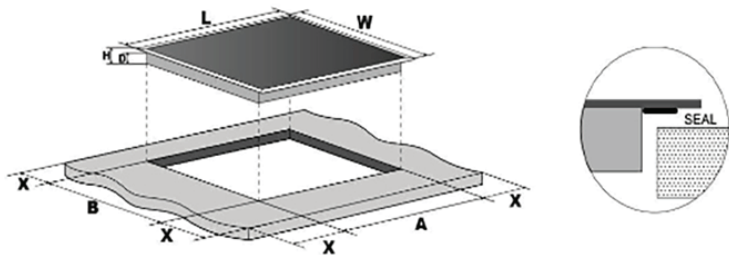

DETAILS:

■ BLACK
WIDTH 900 MM
HEIGHT 520 MM
DEPTH 50 MM
CUT-OUT: 850 X 495 MM

L(mm)	W(mm)	H(mm)	D(mm)	A(mm)	B(mm)	X(mm)
900	520	50	45	850	495	50mini